

DESOLDER GUN

Instruction Sheet

Warning! This tool should not be used on live electrical circuits. It is not protected against electrical shock! Always use CE/OSHA/ANSI or other industry approved eye protection when using tools. This tool is not to be used for purposes other than intended. Read carefully and understand instructions before using this tool.

Complete range of professional quality desoldering tools for solder removal.

Tools feature PTFE or silicon rubber nozzles(see chart).

Extraction springs located outside the vacuum chamber to prevent solder sticking and promote long life.

Anti-static gun versions feature carbon impregnated tips and polished aluminum bodies to provide conduction from the desoldering point through to the operator(some plastic bodies, see chart).

Flexi-vac nozzles can be cut down, or at an angle, to suit the individual users optimum ergonomic operating position. Flexi-vac nozzles are easily replaced by pulling off old and pushing on new one.


WARRANTY: RIPLEY warrants its products against defective materials and workmanship for a period of one year from date of shipment from the RIPLEY factory provided the product is utilized in accordance with instructions and specified ratings. **This does not effect your statutory rights.**



Ripley Europe Ltd
 Building47, Bay4, Second Avenue,
 The Pensnett Estate, Kinkswinford,
 Westmidlands, England. DY6 7UZ.
 Phone: +44(0)1384400070
 Fax: +44(0)1384400060
 E-mail: info@www.ripley-tools.com
 Internet: www.ripley-tools.com



39740 rev.2
 12-01-12 ffdg

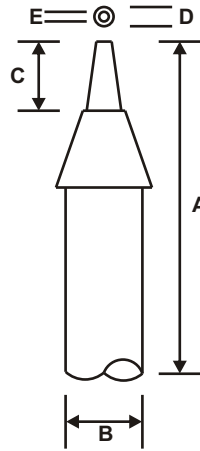

DESOLDERING GUNS



PRODUCT (Part Number)	BODY ALUMINUM	BODY PLASTIC	ANTI-STATIC	NOZZLE PTFE	NOZZLE SILICON RUBBER	A	B	C	D	E	WEIGHT (G)	SPARE NOZZLES (X5)	NEOPRENE WASHERS (X10)
DSG PRM 587 (39455)	√			√		190	20	20	3	1.5	56	39503	39512
DSG PRM AS (39467)	√		√	√		190	20	20	3	1.5	59	39505	39512
DSG PRS 586 (39456)	√			√		180	20	13	5	3.5	56	39502	39512
MINI DSG 583 (39457)	√			√		154	14	15.5	3	1.5	33	39500	39501
ANTI-STATIC DSG 598 (39458)	√		√	√		190	20	20	3	1.5	60	39505	
DSG 59802 MAS (39459)	√		√	√		154	14	15.5	3	1.5	35	39504	39514
VALUVAC 573 (39460)		√		√		184	26	20	3	1.5	39	39507	
VALUVAC 574 AS (39461)		√	√	√		184	26	20	3	1.5	39	39508	
FLEXIVAC 2005 (39462)		√			√	200	26	30	5	2	42	39506	
FLEXIVAC 2006 (39463)		√	√		√	206	26	30	5	2	42	39506	
FLEXIVAC 2007 (39464)	√				√	206	26	30	5	2	61	39506	
FLEXIVAC 2008 (39465)	√			√	√	198	26	30	5	2	60	39506	
FLEXIVAC 2009 (39466)	√		√		√	198	26	30	5	2	60	39506	

All Anti-Static Desoldering Guns comply with European Standards CECC 15.