

# Utility

**Warning! This tool is not protected against electrical shock!** Always use OSHA/ANSI or other industry approved eye protection when using tools. This tool is not to be used for purposes other than intended. Read carefully and understand instructions before using this tool.


## 卓越的可剥离半导体层剥皮器

最新设计的BP1A-M系列,专为国内电力电缆设计.可调式的刻度盘特意设定了.**50mm**(10KV 电缆半导体层厚度)和**80mm**(部分35KV半导体层厚度).用户只要根据不同电压的电缆选择相对应的位置,就可以开始工作.**绝对不伤及绝缘层,解放你的时间免打磨绝缘层繁琐的工作.**




一手抓住电缆,调节好刻度盘上的尺寸到**50mm**.然后如图将工具正面夹入电缆,此时工具内的刀具将自动深入半导体层.另一手轻握工具旋转360度即可

**注:如使用BP1A-M剥300mm<sup>2</sup>及以上规格电缆时,可在50mm基础上多加两小格.**

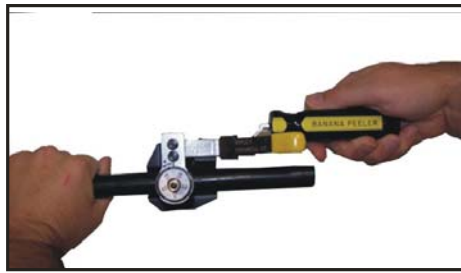

如图松开工具,使工具与电缆平行.从第一步中刀片在电缆上形成的刻痕处,往电缆端头处拉3至4次(根据电缆的截面大小定),工具内的刀片即在电缆表面上形成了数条刻痕即可. **建议:在做第二步前用专用剥皮钳3011,先将电缆端头的半导体层剥开稍许,便与第三步中更好的剥皮.**



使用专用**剥皮钳lauss3011**,进行快速和安全的剥离.



剥皮钳3011,专业尖平头设计,剥皮工作更轻松

**WARRANTY:** The Ripley Company warrants that our line of tools are free of defect and fully operable at the time of shipment. The warranty is limited to the repair or replacement of any product which proves to be defective in material or workmanship, under normal use and service.



46 Nooks Hill Road  
Cromwell, CT 06416  
Phone: 800-528-8665  
Int'l: (01) 860-635-2200  
Fax: (01) 860-635-3631  
e-mail: info@ripley-tools.com  
Internet: www.ripley-tools.com



Part Number

Date & Initial